


ROTATIVE CONTACTS

Function: 0-1 | ON / OFF


Code	N° pole	Current Ith [A]	AC3 rated power [kW]	Switching Angles	Cable cross section [mm²]	øW [mm]	L [mm]
K1001	1	16	1.5	60°	2 X 1.5 ÷ 2.5	43	29.5
K2001	1	20	2.2	60°	2 X 1.5 ÷ 2.5	43	29.5
K3001	1	25	3	60°	2 X 1.5 ÷ 2.5	43	29.5
K1002	2	16	1.5	60°	2 X 1.5 ÷ 2.5	43	29.5
K2002	2	20	2.2	60°	2 X 1.5 ÷ 2.5	43	29.5
K3002	2	25	3	60°	2 X 1.5 ÷ 2.5	43	29.5
K1003	3	16	1.5	60°	2 X 1.5 ÷ 2.5	43	29.5
K2003	3	20	4	60°	2 X 1.5 ÷ 2.5	43	29.5
K3003	3	25	5.5	60°	2 X 1.5 ÷ 2.5	43	29.5
K1004	4	16	1.5	60°	2 X 1.5 ÷ 2.5	43	41
K2004	4	20	2.2	60°	2 X 1.5 ÷ 2.5	43	41
K3004	4	25	3	60°	2 X 1.5 ÷ 2.5	43	41

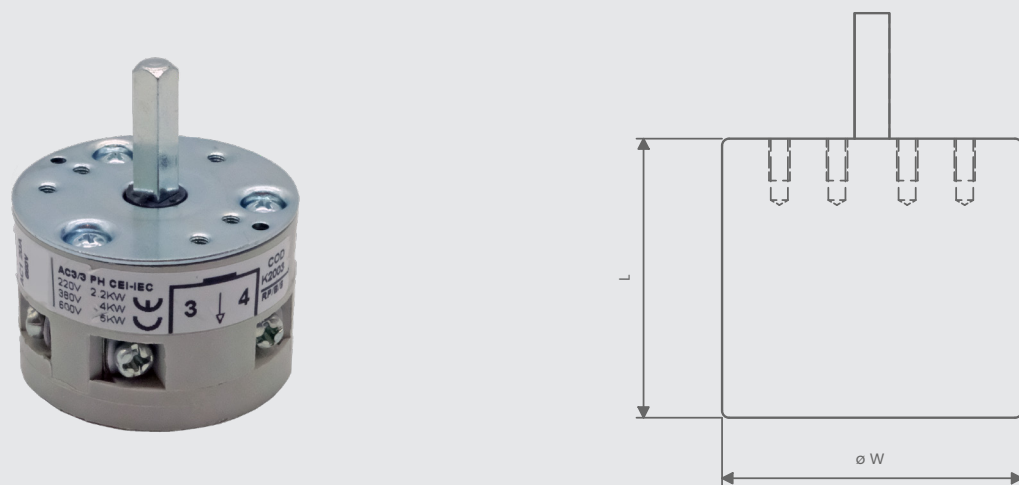

ROTATIVE CONTACTS

Function: 1-0-2 | MAINS TRANSFER

Code	N° pole	Current Ith [A]	AC3 rated power [kW]	Switching Angles	Cable cross section [mm²]	øW [mm]	L [mm]
K1011	1	16	1.5	60°	2 X 1.5 ÷ 2.5	43	29.5
K2011	1	20	2.2	60°	2 X 1.5 ÷ 2.5	43	29.5
K3011	1	25	3	60°	2 X 1.5 ÷ 2.5	43	29.5
K1012	2	16	1.5	60°	2 X 1.5 ÷ 2.5	43	41
K2012	2	20	2.2	60°	2 X 1.5 ÷ 2.5	43	41
K3012	2	25	3	60°	2 X 1.5 ÷ 2.5	43	41
K1013	3	16	2.2	60°	2 X 1.5 ÷ 2.5	43	41
K2013	3	20	4	60°	2 X 1.5 ÷ 2.5	43	41
K3013	3	25	5.5	60°	2 X 1.5 ÷ 2.5	43	41
K1014	4	16	2.2	60°	2 X 1.5 ÷ 2.5	43	53.5
K2014	4	20	4	60°	2 X 1.5 ÷ 2.5	43	53.5
K3014	4	25	5.5	60°	2 X 1.5 ÷ 2.5	43	53.5

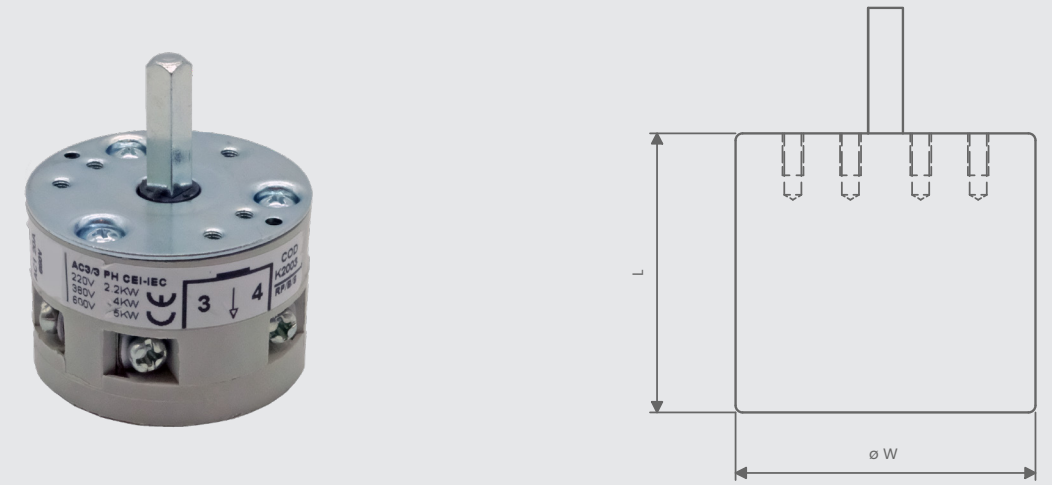



Function: 1-2 | CHANGE OVER

Code	N° pole	Current Ith [A]	AC3 rated power [kW]	Switching Angles	Cable cross section [mm²]	øW [mm]	L [mm]
K1021	1	16	1.5	60°	2 X 1.5 ÷ 2.5	43	29.5
K2021	1	20	2.2	60°	2 X 1.5 ÷ 2.5	43	29.5
K3021	1	25	3	60°	2 X 1.5 ÷ 2.5	43	29.5
K1022	2	16	1.5	60°	2 X 1.5 ÷ 2.5	43	41
K2022	2	20	2.2	60°	2 X 1.5 ÷ 2.5	43	41
K3022	2	25	3	60°	2 X 1.5 ÷ 2.5	43	41
K1023	3	16	2.2	60°	2 X 1.5 ÷ 2.5	43	41
K2023	3	20	4	60°	2 X 1.5 ÷ 2.5	43	41
K3023	3	25	5.5	60°	2 X 1.5 ÷ 2.5	43	41

DATASHEET 2021

